



LANCOM OAP-1700B

Enterprise-class outdoor WLAN for a large number of mobile devices

For an excellent outdoor Wi-Fi experience with a high number of WLAN clients, a future-proof infrastructure is required. This access point with internal antennas offers 11ac Wave 2 WLAN (Wi-Fi 5) for best WLAN quality in radio networks with many parallel users – so-called high-density environments. The additionally integrated Bluetooth Low Energy radio module also enables modern BLE beaconing-based applications. Trust in reliable and secure Wi-Fi - "Made in Germany".

- Dual Concurrent WLAN - parallel operation in 2.4 and 5 GHz with up to 1733 Mbps/s in IEEE 802.11ac Wave 2 and 450 Mbps in IEEE 802.11n
- Robust IP67 protective housing - reliable even in extreme temperatures (-33°C to +70°C)
- Integrated sector antennas for 2.4 and 5 GHz
- Bluetooth Low Energy radio module for innovative beaconing applications
- Connections for Gigabit Ethernet with Power over Ethernet according to IEEE 802.3at
- Zero-touch deployment by LANCOM WLAN controller or LANCOM Management Cloud
- Easy and secure integration of external users with the LANCOM Public Spot Option

LANCOM OAP-1700B

Dual concurrent Wi-Fi with up to 1733 Mbps

The LANCOM OAP-1700B offers two WLAN radio modules for parallel operation in the 2.4 and 5 GHz frequency band. This makes it the ideal choice for providing a modern outdoor hotspot in high-density environments or for professional WLAN coverage of outdoor spaces in enterprise environments—thanks to IEEE 802.11ac Wave 2 at up to 1733 Mbps.

Maximum reliability in all weathers

The LANCOM OAP-1700B has a rugged IP67 protective housing, making it fully dust proof and water-jet resistant. It withstands temperatures between -33°C and +70°C to guarantee reliable operations even under extreme conditions.

Integrated beaconing technology

The Bluetooth Low Energy radio module integrated in the LANCOM OAP-1700B is the technical basis for modern BLE beaconing-based applications, such as push advertising services for mobile devices (iBeacon). Future firmware updates can also be used to implement additional services such as the localization of persons from objects (asset tracking / management) via partner solutions.

160-MHz channel width

Increasing the channel width from 80 to 160 MHz doubles the performance of Wave 2 clients. By optimizing the use of the radio spectrum, a client can be supplied with a data rate of up to 1733 Mbps.

Active Radio Control for dynamic radio-field optimization

The LANCOM OAP-1700B supports the WLAN optimization feature LANCOM Active Radio Control. This intelligent combination of innovative features included with the LCOS operating system—such as Band Steering, Adaptive Noise

Immunity, Adaptive RF Optimization, Airtime Fairness and Client Steering—sustainably increases WLAN performance and supports administrators with professional tools for WLAN management.

Active Radio Control for dynamic radio-field optimization

The LANCOM OAP-1700B supports the Wi-Fi optimization feature LANCOM Active Radio Control. This intelligent combination of innovative features included with the LCOS operating system—such as Spectral Scan, Band Steering, Adaptive Noise Immunity, Adaptive RF Optimization, Airtime Fairness, and Client Steering—sustainably increases Wi-Fi performance and supports administrators with professional tools for Wi-Fi management.

LANCOM security for wireless networks

With numerous integrated security features such as IEEE 802.1X, this enterprise-class access point provides optimal security for networks. Administrators and employees alike benefit from professional security policies on the network.

Managed via LANCOM Management Cloud, WLAN controller, or stand-alone

The LANCOM OAP-1700B offers maximum flexibility in operation: Managed via the LANCOM Management Cloud, it is integrated into a holistic, automated network orchestration based on software-defined networking technology. In addition, it can be used centrally via a LANCOM WLAN controller as well as in stand-alone mode.

LANCOM OAP-1700B

LCOS 10.30

WLAN product specifications	
Frequency band 2.4 GHz and 5 GHz	2400-2483.5 MHz (ISM), 5150-5350 MHz and 5470-5725 MHz (depending on country-specific restrictions)
Integrated Antenna Gain	up to 8 dBi in 2.4 GHz and in 5 GHz
HPBW	2.4 GHz: 60° horizontal, 63°-65° vertical 5 GHz: 60° - 69° horizontal, 60°-69° vertical
Data rates IEEE 802.11ac/n	1733 Mbps according to IEEE 802.11ac with MCS9 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11ac/n/a, IEEE 802.11ac/n, IEEE 802.11n/a compatibility mode or pure IEEE 802.11ac, pure IEEE 802.11n, pure IEEE 802.11a mode and data rates selectable
Data rates IEEE 802.11n	450 Mbps according to IEEE 802.11n with MCS23 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11a/n, IEEE 802.11g/n, IEEE 802.11b/g/n or IEEE 802.11b/g compatibility mode or pure IEEE 802.11n, pure IEEE 802.11a, IEEE 802.11g or pure IEEE 802.11b mode and data rates selectable
Data rates IEEE 802.11a/ h	54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection) and data rates selectable
Data rates IEEE 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) compatible to IEEE 802.11b (11, 5.5, 2, 1 Mbps, Automatic Rate Selection), IEEE 802.11b/g compatibility mode or pure IEEE 802.11g or pure IEEE 802.11b and data rates selectable
Range (outdoor / P2P)	The actual range depends on the environmental conditions. The Antenna Distance Calculator on www.lancom-systems.com provides information on the possible data rates and distances.
Output power at radio module WLAN-1, 2.4 GHz per chain	IEEE 802.11b/g: +20 Mbps (1 up to 18 Mbps), +17dBm (54 Mbps); IEEE 802.11n: +20 dBm (MCS 0-3, 20 MHz), +15 dBm (MCS 8, 20 MHz), +20 dBm (MCS 0-3, 40 MHz), +15 dBm (MCS 9, 40 MHz)
Output power at radio module WLAN-2, 5 GHz per chain	Maximum transmit power may be limited below these numbers to ensure compliance with local regulatory requirements. IEEE 802.11a/h: +21 dBm (6 up to 18 Mbps), +17 dBm (54 Mbps); IEEE 802.11n/ac: +21 dBm (MCS 0-2, 20 MHz), +15 dBm (MCS 8, 20 MHz), +21 dBm (MCS 0-2, 40 MHz), +15 dBm (MCS 9, 40 MHz); IEEE 802.11ac: +20 dBm (MCS 0-3, 80 MHz), +15 dBm (MCS 9, 80 MHz)
Minimum transmission power	Transmission power reduction in software in 1 dB steps to min. 0.5 dBm
Receiver sensitivity WLAN-1, 2.4 GHz	IEEE 802.11b: -95 dBm (1 MBit/s), -89 dBm (11 MBit/s); IEEE 802.11g: -93dBm (6 MBit/s), -73dBm (54 MBit/s); IEEE 802.11n: -93 dBm (MCS 0, 20 MHz), -69 dBm (MCS 8, 20 MHz), -92 dBm (MCS 0, 40 MHz), -65 dBm (MCS 9, 40 MHz)
Receiver sensitivity WLAN-2, 5 GHz	IEEE 802.11a/h: -94 dBm (6 Mbps), -77 dBm (54 Mbps); IEEE 802.11n/ac: -94 dBm (MCS0, 20 MHz), -71dBm (MCS 8, 20 MHz), -91 dBm (MCS 0, 40 MHz), -66 dBm (MCS 9, 40 MHz); IEEE 802.11ac: -88 dBm (MCS 0, 80 MHz), -62 dBm (MCS 9, 80 MHz)
Radio channels 5 GHz	Up to 26 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations)
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions)
Multi-SSID	Up to 30 independent WLAN networks
Concurrent WLAN clients	Up to 512 clients (recommended)
Others	Wireless Quality Indicators (WQI), Hotspot 2.0
PRP	Packet loss of point-to-point connections can be reduced by using the Parallel Redundancy Protocol with dual radio access points due to parallel data transmissions
*) Note	The effective distances and transmission rates that can be achieved are depending of the onsite RF conditions
Supported WLAN standards	
IEEE standards	IEEE 802.11ac Wave 2 (Wi-Fi 5), IEEE 802.11n (Wi-Fi 4), IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X, IEEE 802.11u, IEEE 802.11r (Fast Roaming), IEEE 802.11k, IEEE 802.11v, IEEE 802.11w (Protected Management Frames), WME and U-APSD/WMM Power Save as defined in IEEE 802.11e, IEEE 802.11h, IEEE 802.11d
Standard IEEE 802.11ac (Wi-Fi 5)	
Supported features	4x4 MIMO, 80 MHz/160 MHz channels, MU-MIMO, QAM-256
Standard IEEE 802.11n (Wi-Fi 4)	
Supported features	3x3 MIMO, 40 MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval
WLAN operating modes	
Modes	WLAN access point (standalone, WLC or LANCOM Management Cloud managed), WLAN bridge (P2P or P2MP) (standalone or AutoWDS*), (standalone, WLC or LANCOM Management Cloud managed), WLAN client mode, transparent WLAN client mode
*) Note	Only in installations with WLAN controller

LANCOM OAP-1700B

LCOS 10.30

Security	
Encryption options	WPA3-Personal, IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), IEEE 802.11i (WPA2-Personal), WPA2™, WPA, WEP, IEEE 802.11w (Protected Management Frames), LEPS-MAC (LANCOM Enhanced Passphrase Security MAC), LEPS-U (LANCOM Enhanced Passphrase Security User)
Encryption	AES-CCMP AES-GCMP, TKIP, RC4 (only used by WEP)
EAP types (authenticator)	EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST
RADIUS/EAP-server	User administration MAC-based, rate limiting, passphrases, VLAN user based, authentication of IEEE 802.1X clients via EAP-TLS, EAP-TTLS, EAP-MD5, EAP-GTC, PEAP, MSCHAP or MSCHAPv2
Others	WLAN protocol filters, IP-redirection of any packet received over the WLAN interface, IEEE 802.1X supplicant, background scanning, client detection ("rogue WLAN client detection"), Wireless Intrusion Detection System (WIDS), RADIUS CoA (Change of Authorization)
LANCOM Active Radio Control	
Client Management	Steering of WLAN clients to the ideal access point using 802.11k and 802.11v
Band Steering	Steering of 5GHz clients to the corresponding high-performance frequency band
Managed RF Optimization*	Selection of optimal WLAN channels by the administrator
Adaptive Noise Immunity	Better WLAN throughput due to immunity against interferences
Spectral Scan	Monitoring your WLAN for sources of interference
Adaptive RF Optimization	Dynamic selection of the optimal WLAN channel
Airtime Fairness	Improved utilization of the WLAN bandwidth
Adaptive Transmission Power	Automatic adjustment of the transmission power for Wi-Fi backup scenarios
*) Note	Only in installations with WLAN controller
Roaming	
Roaming	IAPP (Inter Access Point Protocol), IEEE 802.11r (Fast Roaming), OKC (Opportunistic Key Caching), Fast Client Roaming (only in operating mode client modus)
Bluetooth Low Energy (BLE)	
iBeacon	Support for iBeacon. The UUID as well as the major and minor ID are configurable. On top of that, all three radiated powers are supported (near, immediate, far).
Support of Bluetooth Low Energy technology (BLE)	The device is equipped with a BLE radio module and can thus transmit a configurable iBeacon. The UUID as well as the major and minor ID are configurable. On top of that, all three radiated powers are supported (near, immediate, far).
Layer 2 features	
VLAN	4.096 IDs based on IEEE 802.1q, dynamic assignment, Q-in-Q tagging
Quality of Service	WME based on IEEE 802.11e, Wi-Fi Certified™ WMM®
Rate limiting	SSID based, WLAN client based
Multicast	IGMP-Snooping, Multicast-to-Unicast-conversion on WLAN interfaces
Protocols	Ethernet over GRE-Tunnel (EoGRE), L2TPv3, ARP-Lookup, LLDP, DHCP option 82, IPv6-Router-Advertisement-Snooping, DHCPv6-Snooping, LDRA (Lightweight DHCPv6 Relay Agent), Spanning Tree, Rapid Spanning Tree, ARP, Proxy ARP, BOOTP, DHCP, LACP
Layer 3 features	
Firewall	Stateful inspection firewall including packet filtering, extended port forwarding, N:N IP address mapping, packet tagging, support for DNS targets, user-defined rules and notifications
Quality of Service	Traffic shaping, bandwidth reservation, DiffServ/TOS, packet size control, layer-2-in-layer-3 tagging
Security	Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button
PPP authentication mechanisms	PAP, CHAP, MS-CHAP, and MS-CHAPv2
High availability / redundancy	VRRP (Virtual Router Redundancy Protocol), analog/GSM modem backup
Router	IPv4-, IPv6-, NetBIOS/IP multiprotokoll router, IPv4/IPv6 dual stack
Router virtualization	ARF (Advanced Routing and Forwarding) up to separate processing of 16 contexts

LANCOM OAP-1700B

LCOS 10.30

Layer 3 features	
IPv4 services	HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy, RADIUS
IPv6 services	HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy, RADIUS
Dynamic routing protocols	RIPv2
IPv4 protocols	DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+
IPv6 protocols	NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, Syslog, SNMPv1,v2c,v3
WAN operating mode	VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port
WAN protocols	PPPoE, Multi-PPPoE, ML-PPP, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS), L2TPv3 with Ethernet-Pseudowire, IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static)
Tunneling protocols (IPv4/IPv6)	6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel)
Interfaces	
Ethernet ports	2 x 10/100/1000BASE-T autosensing (RJ-45), IEEE 802.3az, PoE (Power over Ethernet) at ETH1
Internal antenna	Radio module 1 uses three internal antennas, radio module 2 uses four internal antennas and BLE radio module uses one internal antenna
Hardware	
Power supply	Via Power over Ethernet, compliant with IEEE 802.3at
Environment	Temperature range -33° to +70 °C
Power consumption (max)	Approx. 15.1 W via PoE (value solely refers to the power consumption of the access point)
Housing	Robust metal housing, IP67 protection rating, ready for wall and pole mounting, 3 LEDs for status display, please note: device must not be mounted in salt water environments without a suitable protective housing; Dimensions 255 × 250 × 80 mm (length x width x depth)
Management and monitoring	
Management	LANCOM Management Cloud, LANconfig, WEBconfig, WLAN controller, LANCOM Layer 2 management (emergency management)
Management functions	Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable separately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job
FirmSafe	Two stored firmware versions, incl. test mode for firmware updates
automatic firmware update	configurable automatic checking and installation of firmware updates
Monitoring	LANCOM Management Cloud, LANmonitor, WLANmonitor
Monitoring functions	Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events
Monitoring statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG, Layer 7 Application Detection including application-centric tracking of traffic volume
IPerf	IPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server)
SLA-Monitor (ICMP)	Performance monitoring of connections
SD-WLAN	SD-WLAN – automatic WLAN configuration via the LANCOM Management Cloud
SD-LAN	SD-LAN – automatic LAN configuration via the LANCOM Management Cloud
Declarations of conformity*	
CE	EN 50581, EN 62368-1, EN 62311, EN 301 489-1, EN 301 489-17
5 GHz WLAN	EN 301 893

LANCOM OAP-1700B

LCOS 10.30

Declarations of conformity*	
2.4 GHz WLAN	EN 300 328
IPv6	IPv6 Ready Gold
Country of Origin	Made in Germany
*) Note	You will find all declarations of conformity in the products section of our website at www.lancom-systems.com
Scope of delivery	
Manual	Hardware Quick Reference (DE/EN), Installation Guide (DE/EN)
Cable	Water-resistant, UV-resistant Ethernet PoE cable with water-resistant screw connector, 15m
Mounting Kit	Mounting kit for wall and pole mounting
Power supply unit	Via Power over Ethernet compliant with IEEE 802.3at, 1 x PoE Injector supplied
Support	
Warranty	3 years support
Software updates	Regular free updates (LCOS operating system and LANtools) via Internet
Options	
LANCOM Warranty Basic Option L	Option to extend the manufacturer's warranty from 3 to 5 years, item no. 10712
LANCOM Warranty Advanced Option L	Option to extend the manufacturer's warranty from 3 to 5 years and replacement of a defective device, item no. 10717
LANCOM OAP VPN	Option for the extension of the LANCOM OAP-8xx and OAP-170xB series with IPsec VPN functionality, 5 active VPN channels enable the secure maintenance and management of OAPs, and the provision of confidential WLANs via a VPN connection to the company headquarters, item no. 61635
LANCOM Public Spot	Hotspot option for LANCOM products, versatile access (via voucher, e-mail, SMS), including a comfortable setup wizard, secure separation of guest access and internal network, item no. 60642
LANCOM Management Cloud	
LANCOM LMC-A-1Y LMC License	LANCOM LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the LANCOM Management Cloud, item no. 50100
LANCOM LMC-A-3Y LMC License	LANCOM LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the LANCOM Management Cloud, item no. 50101
LANCOM LMC-A-5Y LMC License	LANCOM LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the LANCOM Management Cloud, item no. 50102
Accessories	
LANCOM WLAN controllers	LANCOM WLC-4006+, item no. 62035 (EU), item no. 62036 (UK) and item no. 62037 (US), LANCOM WLC-1000, item no. 61783 (EU), LANCOM WLC Basic Option for Routers, item no. 61639
Surge arrestor (LAN cable)	AirLancer Extender SN-LAN surge arrestor (LAN cable), item no. 61261
LAN cable (outdoor)	LANCOM OAP Ethernet cable (30 m), item no. 61347
Power over Ethernet Injector	1-port PoE injector with Gigabit support, integrated power supply, compatible with the standard IEEE 802.3af/at, item no. 61738 (EU) and 61739 (UK)


LANCOM OAP-1700B

LCOS 10.30

Item number(s)

LANCOM OAP-1700B (EU)

61820

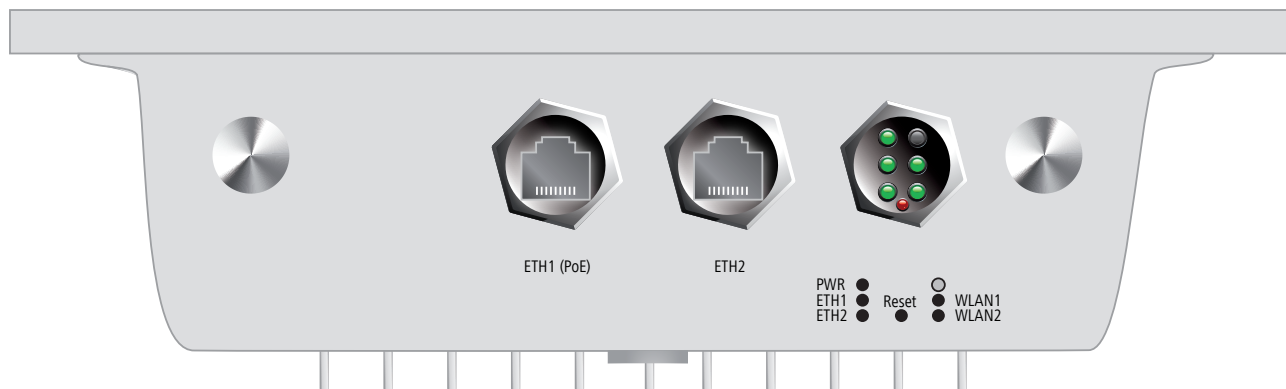

LANCOM, LANCOM Systems, LCOS, LANCommunity and Hyper Integration are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. This document contains statements relating to future products and their attributes. LANCOM Systems reserves the right to change these without notice. No liability for technical errors and/or omissions. 08/19